


Commercial twin, triple and double-twin systems · R32



With this system, a single outdoor unit can split its capacity simultaneously across up to 4 indoor units, for better distribution within the space. This makes the system particularly apt for common areas. It reduces noise concentration and enables the same temperature to be reached around the room. A wide variety of the same type of indoor units can be connected in multi combinations (including wall-mounted, cassette, hide-away and ceiling).

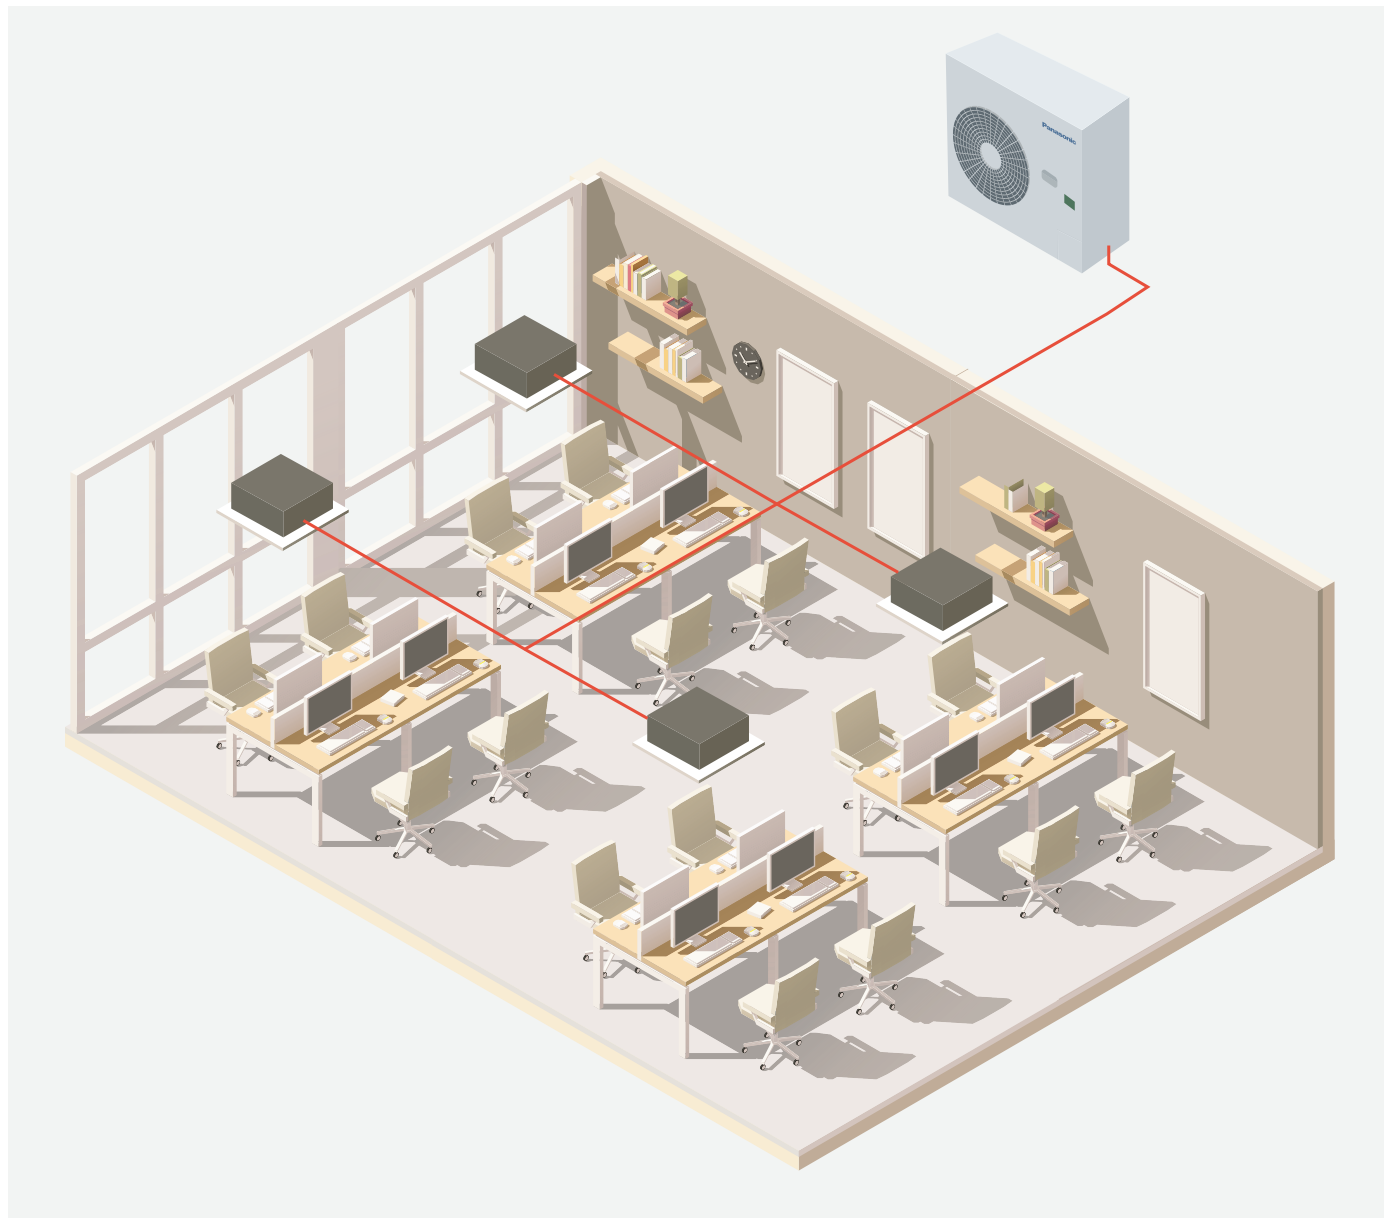

- 1 PACi NX Elite from 5,0 to 14,0 kW**
 Up to 4 indoor units can be connected to the same outdoor unit. Panasonic's Elite units 5,0, 7,1, 10,0, 12,0 and 14,0 can be installed as twin, triple and double-twin systems. The indoor units can be combined as per the selection table. The operation will always be simultaneous. All the indoor units will work with the same settings.
- 2 PACi NX Standard from 10,0 to 14,0 kW**
 Up to 2 indoor units connectable on the same outdoor. Panasonic's Standard units can be installed as single and twin systems. The indoor units can be combined following the selection table. The operation will always be simultaneous. All the indoor units will work with the same settings.
- 3 Big PACi NX from 20,0 to 25,0 kW**
 Up to 4 indoor units can be connected to the same outdoor unit. Panasonic's PACi NX units 20,0 and 25,0 can be installed as twin, triple and double-twin systems. The indoor units can be combined as per the selection table. The operation will always be simultaneous. All the indoor units will work with the same settings.

Commercial twin, triple and double-twin systems - R32



PACi NX Elite outdoor units - R32

			PACi NX					Big PACi NX	
			5,0 kW	7,1 kW	10,0 kW	12,5 kW	14,0 kW	20,0 kW	25,0 kW
Outdoor unit single phase			U-50PZH3E5	U-71PZH4E5	U-100PZH4E5	U-125PZH4E5	U-140PZH4E5	—	—
Outdoor unit three phase			—	U-71PZH4E8	U-100PZH4E8	U-125PZH4E8	U-140PZH4E8	U-200PZH4E8	U-250PZH4E8
Cooling capacity ¹⁾	Nominal (Min - Max)	kW	5,0 (1,2 - 5,6)	7,1 (2,2 - 9,0)	9,5 (3,1 - 12,5)	12,5 (3,2 - 14,0)	13,4 (3,3 - 16,0)	19,0 (5,7 - 20,0)	22,0 (6,1 - 25,6)
Heating capacity ¹⁾	Nominal (Min - Max)	kW	5,6 (1,2 - 6,5)	8,0 (2,0 - 9,0)	11,2 (3,1 - 14,0)	14,0 (3,2 - 16,0)	16,0 (3,3 - 18,0)	22,4 (5,0 - 24,5)	24,0 (5,5 - 27,6)
Power supply	Single phase	V	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	—	—
	Three phase	V	—	380 - 400 - 415	380 - 400 - 415	380 - 400 - 415	380 - 400 - 415	380 - 400 - 415	380 - 400 - 415
Connection indoor / outdoor		mm ²	2x1,5 or 2,5	2x1,5 or 2,5	2x1,5 or 2,5	2x1,5 or 2,5	2x1,5 or 2,5	—	—
Air flow	Cool / Heat	m ³ /min	42,0/42,0	62,0/66,0	76,0/70,0	86,0/78,0	89,0/83,0	164/164	160/160
Sound pressure	Cool / Heat (Hi)	dB(A)	46/48	48/50	52/52	55/55	56/56	59/61	59/63
Sound power	Cool / Heat (Hi)	dB(A)	64/67	65/67	69/69	73/73	74/74	77/79	78/82
Dimension	H x W x D	mm	695 x 875 x 320	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	996 x 1140 x 460	996 x 1140 x 460
Net weight	1ph / 3ph	kg	42	66	84/82	86/84	86/84	109	109
Piping diameter	Liquid	Inch (mm)	1/4 (6,35)	3/8 (9,52)	3/8 (9,52)	3/8 (9,52)	3/8 (9,52)	1/2 (12,70)	1/2 (12,70)
	Gas	Inch (mm)	1/2 (12,70)	5/8 (15,88)	5/8 (15,88)	5/8 (15,88)	5/8 (15,88)	7/8 (22,22)	7/8 (22,22)
Pipe length range	Min ~ Max	m	3 ~ 40	5 ~ 60	5 ~ 100	5 ~ 100	5 ~ 100	5 ~ 100	5 ~ 100
Elevation difference (in / out)	Max	m	15/30	15/30 ²⁾	15/30 ²⁾	15/30 ²⁾	15/30 ²⁾	30	30
Pre-charged pipe length		m	30	30	30	30	30	30	30
Additional gas amount		g/m	15	30	40	40	40	80	80
Refrigerant (R32) / CO ₂ Eq.		kg / T	1,13/0,76	1,95/1,32	2,70/1,82	3,00/2,03	3,00/2,03	4,80/3,24	4,80/3,24
Operating range	Cool Min ~ Max	°C	-15 ~ +46	-15 ~ +52	-20 ³⁾ ~ +52	-20 ³⁾ ~ +52	-20 ³⁾ ~ +52	-15 ~ +52	-15 ~ +52
	Heat Min ~ Max	°C	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +35	-20 ~ +35

1) 5,0 kW with wall-mounted. 7,1 - 14,0 kW with 4 way 90x90 cassette. 20,0 - 25,0 kW with high static pressure hide-away. 2) Outdoor unit located lower / outdoor unit located higher. 3) Pipe length up to 30 m.



PACi NX Standard outdoor units - R32

			10,0 kW	12,5 kW	14,0 kW
Outdoor unit single phase			U-100PZ3E5	U-125PZ3E5	U-140PZ3E5
Outdoor unit three phase			U-100PZ3E8	U-125PZ3E8	U-140PZ3E8
Cooling capacity ¹⁾	Nominal (Min - Max)	kW	10,0 (3,0 - 11,5)	12,5 (3,2 - 13,5)	14,0 (3,3 - 15,0)
Heating capacity ¹⁾	Nominal (Min - Max)	kW	10,0 (3,0 - 14,0)	12,5 (3,3 - 15,0)	14,0 (3,4 - 16,0)
Power supply	Single phase	V	220-230-240	220-230-240	220-230-240
	Three phase	V	380-400-415	380-400-415	380-400-415
Connection indoor / outdoor		mm ²	2x1,5 or 2,5	2x1,5 or 2,5	2x1,5 or 2,5
Air flow	Cool / Heat	m ³ /min	73,0/73,0	82,0/80,0	84,0/82,0
Sound pressure	Cool / Heat (Hi)	dB(A)	52/52	55/55	56/56
Sound power	Cool / Heat (Hi)	dB(A)	70/70	73/73	74/74
Dimension	H x W x D	mm	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370
Net weight		kg	83	87	87
Piping diameter	Liquid	Inch (mm)	3/8 (9,52)	3/8 (9,52)	3/8 (9,52)
	Gas	Inch (mm)	5/8 (15,88)	5/8 (15,88)	5/8 (15,88)
Pipe length range	Min ~ Max	m	5 ~ 50	5 ~ 50	5 ~ 50
Elevation difference (in / out) ²⁾	Max	m	15/30	15/30	15/30
Pre-charged pipe length		m	30	30	30
Additional gas amount		g/m	45	45	45
Refrigerant (R32) / CO ₂ Eq.		kg / T	2,4/1,62	2,8/1,89	2,8/1,89
Operating range	Cool Min ~ Max	°C	-10 ~ +43	-10 ~ +43	-10 ~ +43
	Heat Min ~ Max	°C	-15 ~ 24	-15 ~ 24	-15 ~ 24

1) With 4 way 90x90 cassette. 2) Outdoor unit located lower / outdoor unit located higher.

R32

REFRIGERANT



INVERTER+

HIGH EFFICIENCY
COMPRESSOR

DC FAN

R32
R410A
R32 / R410A
RENEWAL5 YEARS
COMPRESSOR
WARRANTY

Compatible indoor units for multi combinations

Optional:



CONEX wired remote controller, white.
CZ-RTC6W/BL/BLW2



CONEX wired remote controller, black.
CZ-RTC6/BL/BLW2



Wired remote controller.
CZ-RTC5B



Econavi sensor.
CZ-CENSC1

PANASONIC AC SMART CLOUD and AC SERVICE CLOUD: Optional.



Wall-mounted - PK4	Indoor unit	Cooling capacity	Heating capacity	Dimension	Sound pressure ¹⁾	Air flow ²⁾
		kW	kW	HxWxD	Hi / Med / Lo	Hi / Med / Lo
				mm	dB(A)	m³/min
2,5 - 5,0 kW	S-2545PK4E	2,5 - 5,0	2,8 - 5,6	290x765x214	39/34/29 - 41/36/30 - 41/36/31	10,5/19,0/17,0 - 11,5/19,5/7,0 - 17,0/15,5/12,0
6,0 - 7,1 kW	S-5010PK4E	6,1 - 7,1	6,1 - 7,8	295x1060x249	47/44/40 - 47/44/40	21,0/19,0/16,5 - 21,0/19,0/16,5
10,0 kW	S-5010PK4E	9,5	9,5	295x1060x249	49/45/41	22,5/20,0/17,5



Panel (sold separately).
CZ-KPY4

PANASONIC AC SMART CLOUD and AC SERVICE CLOUD: Optional.



4 way 60x60 cassette - PY3	Indoor unit (panel CZ-KPY4)	Cooling capacity	Heating capacity	Dimension indoor / panel	Sound pressure ¹⁾	Air flow ²⁾
		kW	kW	HxWxD	Hi / Med / Lo	Hi / Med / Lo
				mm	dB(A)	m³/min
2,5 kW	S-25PY3E	2,5	3,2	243x575x575 / 30x625x625	31/28/25	8,5/7,0/6,0
3,6 kW	S-36PY3E	3,6	4,0	243x575x575 / 30x625x625	34/30/25	9,5/7,5/6,0
5,0 kW	S-50PY3E	5,0	5,6	243x575x575 / 30x625x625	39/34/27	12,0/9,5/6,5
6,0 kW	S-60PY3E	6,0	7,0	243x575x575 / 30x625x625	43/37/31	14,0/10,5/8,0



Panels (sold separately):

Standard, white (RAL9003).
CZ-KPU3



Econavi, white (RAL9003).
CZ-KPU3A



Standard, graphite black (RAL9011).
CZ-KPU3B



PANASONIC AC SMART CLOUD and AC SERVICE CLOUD: Optional.



4 way 90x90 cassette - PU3	Indoor unit (panels CZ-KPU3 / CZ-KPU3B / CZ-KPU3A)	Cooling capacity	Heating capacity	Dimension indoor / panel	Sound pressure ¹⁾	Air flow ²⁾
		kW	kW	HxWxD	Hi / Med / Lo	Hi / Med / Lo
				mm	dB(A)	m³/min
3,6 - 5,0 kW	S-3650PU3E	3,6 - 5,0	4,0 - 5,6	256x840x840 / 33,5x950x950	30/28/27 - 32/29/27	14,5/13,0/11,5 - 16,5/13,5/11,5
6,0 - 7,1 kW	S-6071PU3E	6,0 - 7,1	7,0 - 8,0	256x840x840 / 33,5x950x950	36/31/28 - 37/31/28	21,0/16,0/13,0 - 22,0/16,0/13,0
10,0 - 12,5 kW	S-1014PU3E	10,0 - 12,5	11,2 - 14,0	319x840x840 / 33,5x950x950	45/38/32 - 46/39/33	36,0/26,0/18,0 - 37,0/27,0/19,0
14,0 kW	S-1014PU3E	14,0	16,0	319x840x840 / 33,5x950x950	47/40/34	38,0/29,0/20,0



PANASONIC AC SMART CLOUD and AC SERVICE CLOUD: Optional.



Ceiling - PT3	Indoor unit	Cooling capacity	Heating capacity	Dimension	Sound pressure ¹⁾	Air flow ²⁾
		kW	kW	HxWxD	Hi / Med / Lo	Hi / Med / Lo
				mm	dB(A)	m³/min
3,6 - 5,0 kW	S-3650PT3E	3,5 - 5,0	4,0 - 5,6	235x960x690	36/32/28 - 37/33/28	14,0/12,0/10,5 - 15,0/12,5/10,5
6,0 - 7,1 kW	S-6071PT3E	6,0 - 6,8	7,0 - 8,0	235x1275x690	38/34/29 - 39/35/30	20,0/17,0/14,5 - 21,0/18,0/15,5
10,0 - 12,5 kW	S-1014PT3E	9,5 - 12,1	11,2 - 14,0	235x1590x690	42/37/34 - 46/40/35	30,0/25,0/23,0 - 34,0/28,0/24,0
14,0 kW	S-1014PT3E	13,4	16,0	235x1590x690	47/41/36	35,0/29,0/25,0



PANASONIC AC SMART CLOUD and AC SERVICE CLOUD: Optional.



Adaptive ducted unit - PF3	Indoor unit	Cooling capacity	Heating capacity	Dimension	External static pressure	Sound pressure ¹⁾	Air flow ²⁾
		kW	kW	HxWxD	Nominal (Min - Max)	Hi / Med / Lo	Hi / Med / Lo
				mm	Pa	dB(A)	m³/min
3,6 - 5,0 kW	S-3650PF3E	3,6 - 5,0	4,0 - 5,6	250x800x730	30(10 - 150) - 30(10 - 150)	30/27/22 - 34/30/25	14,0/13,0/10,0 - 16,0/15,0/12,0
6,0 - 7,1 kW	S-6071PF3E	5,7 - 6,8	7,0 - 7,5	250x1000x730	30(10 - 150) - 30(10 - 150)	30/26/23 - 30/26/23	21,0/19,0/15,0 - 21,0/19,0/15,0
10,0 - 12,5 kW	S-1014PF3E	9,5 - 12,1	10,8 - 13,5	250x1400x730	40(10 - 150) - 50(10 - 150)	33/29/25 - 35/31/27	32,0/26,0/21,0 - 34,0/29,0/23,0
14,0 kW	S-1014PF3E	13,4	15,5	250x1400x730	50(10 - 150)	39/35/29	36,0/32,0/25,0

* The data shown in these tables are based on PACi NX Elite combinations. 1) The sound pressure is measured in accordance with Eurovent 6/C/006-97 specification. 2) Factory setting.

Rating conditions: Cooling indoor 27 °C DB / 19 °C WB. Cooling outdoor 35 °C DB / 24 °C WB. Heating indoor 20 °C DB. Heating outdoor 7 °C DB / 6 °C WB. (DB: Dry Bulb; WB: Wet Bulb). Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites www.aircon.panasonic.eu or www.ptc.panasonic.eu.

Simultaneous operation system combinations

PACi NX Elite from 5,0 to 14,0 kW simultaneous operation system combinations · R32

Capacity	Indoor	Outdoor				
		5,0 kW	7,1 kW	10,0 kW	12,5 kW	14,0 kW
2,5 kW	S-25PY3E S-2545PK4E	Twin	Triple	Double-twin		
3,6 kW	S-36PY3E S-3650PF3E S-2545PK4E S-3650PT3E S-3650PU3E		Twin	Triple	Double-twin	
4,5 kW	S-3650PF3E S-2545PK4E S-3650PT3E S-3650PU3E				Triple	
5,0 kW	S-50PY3E S-3650PF3E S-2545PK4E S-3650PT3E S-3650PU3E			Twin		Triple
6,0 kW	S-60PY3E S-6071PF3E S-5010PK4E S-6071PT3E S-6071PU3E				Twin	
7,1 kW	S-6071PF3E S-5010PK4E S-6071PT3E S-6071PU3E					Twin

PACi NX Standard from 10,0 to 14,0 kW simultaneous operation system combinations · R32


Capacity	Indoor	Outdoor		
		10,0 kW	12,5 kW	14,0 kW
5,0 kW	S-50PY3E S-3650PF3E S-2545PK4E S-3650PT3E S-3650PU3E	Twin		
6,0 kW	S-60PY3E S-6071PF3E S-5010PK4E S-6071PT3E S-6071PU3E		Twin	
7,1 kW	S-6071PF3E S-5010PK4E S-6071PT3E S-6071PU3E			Twin

Big PACi NX Elite from 20,0 to 25,0 kW simultaneous operation system combinations · R32


Capacity	Indoor	Outdoor	
		20,0 kW	25,0 kW
5,0 kW	S-3650PF3E S-5010PK4E S-3650PU3E	Double-twin	
6,0 kW	S-3650PF3E S-5010PK4E S-3650PU3E		Double-twin
7,1 kW	S-3650PF3E S-5010PK4E S-3650PU3E	Triple	
10,0 kW	S-3650PF3E S-5010PK4E S-3650PU3E	Twin	
12,5 kW	S-1014PF3E S-1014PU3E		Twin

Refrigerant piping arrangements


Single




Twin



Triple

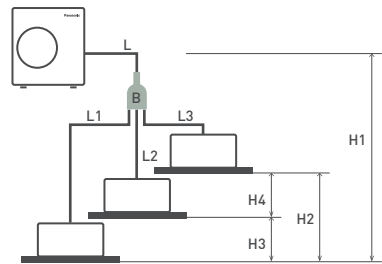

Double-twin

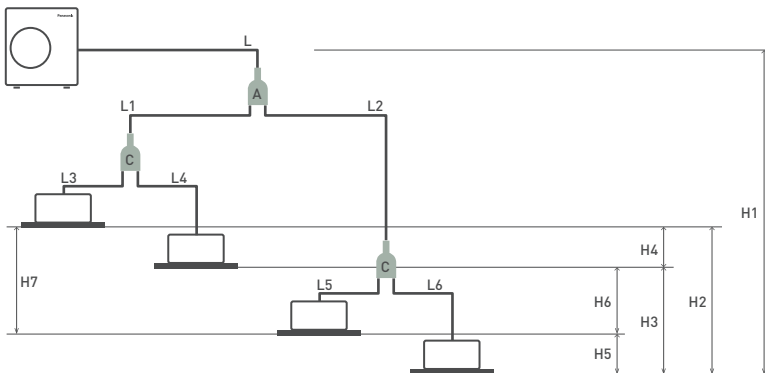

PACi NX Elite twin, triple and double-twin system from 5,0 to 14,0 kW

Joint distribution (sold separately)

A= CZ-P224BK2BM

B= CZ-P3 HPC2BM

C= CZ-P224BK2BM

PACi NX Standard twin system from 10,0 to 14,0 kW

Joint distribution (sold separately)

A= CZ-P224BK2BM

Big PACi NX twin, triple and double-twin system from 20,0 to 25,0 kW

Joint distribution (sold separately)

A= CZ-P680BK2BM

B= CZ-P3 HPC2BM

C= CZ-P224BK2BM

Twin System	PACi NX Standard single and twin system from 7,1 to 14,0 kW			PACi NX Elite twin, triple and double-twin system from 5,0 to 25,0 kW				
	Indoor unit combinations (see examples above)		Equivalent lengths and height differences (m) for outdoor unit sizes...	Indoor unit combinations (see examples above)				Equivalent lengths and height differences (m) for outdoor unit sizes from 5,0 to 14,0 kW
	Single	Twin		Single	Twin	Triple	Double-Twin	
Total pipe length	L	L + L1 + L2	≤ 50 m	L	L + L1 + L2	L + L1 + L2 + L3	L + L1 + L2 + L3 + L4 + L5 + L6	U-50/60: 40 m U-71: 60 m U-100/125/140: ≤ 100 m
Maximum pipe length from outdoor unit to most distant indoor unit	-	-	-	-	L + L1 or L + L2	L + L1 or L + L2 or L + L3	L + L1 + L3 or L + L1 + L4 or L + L2 + L5 or L + L2 + L6	U-200/250: ≤ 100 m
Maximum branch pipe length	-	L1 L2	≤ 15	-	L1 or L2	L1 or L2 or L3	L1 + L3 or L1 + L4 or L2 + L5 or L2 + L6	≤ 15 m
Maximum branch pipe length differences	-	L1 > L2 L1 - L2	≤ 10	-	L1 > L2: L1 - L2	L1 > L2 > L3: L1 - L2 L2 - L3 L1 - L3	L2 + L6 (Max.) L1 + L3 (Min.): (L2 + L6) - (L1 + L3)	≤ 10 m
Maximum pipe length differences after first branch (Double-Twin)	-	-	-	-	-	-	L2 > L1: L2 - L1	≤ 10 m
Maximum pipe length differences after second branch (Double-Twin)	-	-	-	-	-	-	L4 > L3: L4 - L3 L6 > L5: L6 - L5	≤ 10 m
Height difference (outdoor unit located higher)	H1	H1	≤ 30	H1	H1	H1	H1	≤ 30 m
Height difference (outdoor unit located lower)	H1	H1	≤ 15	H1	H1	H1	H1	≤ 15 m
Height difference between indoor units	-	H2	≤ 0,5	-	H2	H2 or H3 or H4	H2 or H3 or H4 or H5 or H6	≤ 0,5 m

Make additional charges by adding up tube length in an order of main tube (L) > branch tube (L1 > L2 > L3 wide diameter) and then selecting the amount of refrigerant corresponding to the remaining (after charge-less tube length: 30 m) liquid tube diameter and tube length from the above table.

For pipe sizes and refrigerant charge, please refer to the technical instructions or design software.