

Accessories and control

Drain kits

Drain kit to suit outdoor units from 3,6 to 7,1 kW.

CZ-50DRS1

Drain kit to suit outdoor units from 10,0 to 25 kW.

CZ-140DRS1

Branch Pipes, Header



Branch pipe.

CZ-P224BK2BM



Branch pipe (from 22,4 kW to 68 kW).

CZ-P680BK2BM



Header.

CZ-P3HPC2BM

Special outdoor supports



Tray for condenser water compatible with outdoor elevation platform.

PAW-WTRAY



Outdoor elevation platform.

Dimension (H x W x D): 400 x 900 x 400 mm

PAW-GRDSTD40




Outdoor base ground support for noise and vibration absorption.

Dimension (H x W x D): 600 x 95 x 130 mm
Safe working load: 500 kg

PAW-GRDBSE20

Panels



Panel for 4 way 60x60 cassette - PY3.

CZ-KPY4



Standard panel for 4 way 90x90 cassette, white (RAL9003).

CZ-KPU3



Econavi panel for 4 way 90x90 cassette, white (RAL9003).

CZ-KPU3A



NEW Standard panel for 4 way 90x90 cassette, graphite black (RAL9011).

CZ-KPU3B

Sensors



Econavi energy saving sensor.

CZ-CENSC1



Remote temperature sensor.

CZ-CSRC3



Fresh air-intake kit.

CZ-FDU3+CZ-ATU2

IAQ filter for adaptive ducted unit



BION air pollutant filter for S-3650PF3E.

PAW-APF800F


BION air pollutant filter for S-6071PF3E.

PAW-APF1000F

BION air pollutant filter for S-1014PF3E.

PAW-APF1400F

Plenums

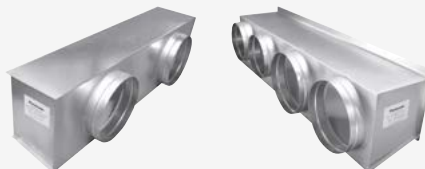

Air outlet plenum for S-3650PF3E.

CZ-56DAF2

Air outlet plenum for S-1014PF3E.

CZ-160DAF2

Air outlet plenum for S-200PE4E.

CZ-TREMIESPW705

Air outlet plenum for S-6071PF3E.

CZ-90DAF2

Air outlet plenum for S-250PE4E.

CZ-TREMIESPW706

VRF Smart Connectivity+



Remote controller Panasonic Net Con, RH, No PIR, R1/R2.

SER8150R0B1194

Remote controller Panasonic Net Con, RH, PIR, R1/R2.

SER8150R5B1194



Wireless ZigBee® Pro module / Green Com card.

VCM8000V5094P



Door/window wireless sensor.

SED-WDC-G-5045



Wall/ceiling motion/temperature/humidity sensor.

SED-MTH-G-5045

CO₂ sensor.

SED-CO2-G-5045



Sensor with room temperature and humidity.

SED-TRH-G-5045



Water leakage sensor.

SED-WLS-G-5045

**Cover frame. Silver.**

FAS-00

**Cover frame. White.**

FAS-01

**Cover frame. Glossy translucent white.**

FAS-03

**Cover frame. Light tan wood.**

FAS-05

**Cover frame. Dark brown wood.**

FAS-06

**Cover frame. Dark black wood.**

FAS-07

**Cover frame. Brushed steel finish.**

FAS-10


Controller and touch controllers for hotels with dry contacts

**Modbus RS-485 touch room controller with I/O, white.**

PAW-RE2C4-MOD-WH

Touch display control with 2 digital inputs, white.

PAW-RE2D4-WH

**Modbus RS-485 touch room controller with I/O, black.**

PAW-RE2C4-MOD-BK

Touch display control with 2 digital inputs, black.

PAW-RE2D4-BK

Hotel sensors for dry contacts

**Wall silent motion sensor 24 V.**

PAW-WMS-DC

Wall silent motion sensor 240 V AC.

PAW-WMS-AC

**Ceiling silent motion sensor 24 V.**

PAW-CMS-DC

Ceiling silent motion sensor 240 V AC.

PAW-CMS-AC

**Power supply 24 V.**

PAW-24DC

**Door or window contact.**

PAW-DWC

Centralised controls

**System controller for 64 indoor units with weekly timer.**

CZ-64ESMC3

**Central ON / OFF controller, up to 16 groups, 64 indoor units.**

CZ-ANC3

**Intelligent controller (touch screen/web server) to control up to 256 indoors with included load distribution ratio (LDR).**

CZ-256ESMC3

Panasonic AC Smart Cloud



+ ALL REFERENCES RELATED TO AC SMART CLOUD IS IN THE DEDICATED PAGE

Panasonic AC Smart Cloud. Cloud internet control. Up to 128 groups. Controls 128 units.

CZ-CFUSCC1

BMS interface with S-Link



A unified interface supporting Modbus, BACnet, and KNX protocols for up to 16 indoor units.

PAW-AC2-BMS-16

A unified interface supporting Modbus, BACnet, and KNX protocols for up to 64 indoor units.

PAW-AC2-BMS-64

A unified interface supporting Modbus, BACnet, and KNX protocols for up to 128 indoor units.

PAW-AC2-BMS-128

Accessories interfaces




Commercial Wi-Fi Adaptor.

CZ-CAPWFC2



KNX interface (Intesis).

PAW-RC2-KNX-1i



Modbus RTU interface (Intesis).

PAW-RC2-MBS-1



Modbus RTU interface to control 4 indoor/ groups (Intesis).

PAW-RC2-MBS-4



BACnet IP and MSTP (Intesis).

PAW-RC2-BAC-1



KNX interface (Airzone).

PAW-AZRC-KNX-1



Modbus RTU interface (Airzone).

PAW-AZRC-MBS-1



BACnet IP and MSTP interface (Airzone).

PAW-AZRC-BAC-1



RAC interface adapter for integration into S-Link, plus external input and alarm/ status output (for YKEA units).

CZ-CAPRA1

Centralised controls. Connection with general equipment

 Adaptor for ON / OFF control of external devices. ----- CZ-CAPC3	 Mini series parallel device controlling indoor units, maximum 1 group and 8 indoor unit. ----- CZ-CAPBC2	 Communication Adaptor. Up to 128 groups. Controls 128 units. ----- CZ-CFUNC2
---	---	---

Individual controls

 CONEX wired remote controller (non-wireless), white. ----- CZ-RTC6W	 CONEX wired remote controller with Bluetooth®, white. ----- CZ-RTC6WBL	 CONEX wired remote controller with Wi-Fi and Bluetooth®, white. ----- CZ-RTC6WBLW2	 CONEX wired remote controller (non-wireless), black. ----- CZ-RTC6
 CONEX wired remote controller with Bluetooth®, black. ----- CZ-RTC6BL	 CONEX wired remote controller with Wi-Fi and Bluetooth®, black. ----- CZ-RTC6BLW2	 Design Wired remote controller with Econavi function. ----- CZ-RTC5B	 Infrared remote controller for wall-mounted. ----- CZ-RWS3
 Infrared remote controller and receiver for 4 way 60x60 cassette - PY3 with panel. ----- CZ-RWS3 + CZ-RRWY3	 Infrared remote controller and receiver for 4 way 90x90 cassette. ----- CZ-RWS3 + CZ-RWRU3	 Infrared remote controller and receiver for ceiling. ----- CZ-RWS3 + CZ-RWRT3	 Infrared remote controller and receiver for all indoor units. ----- CZ-RWS3 + CZ-RWRC3

Accessories PCB

 T10 interface PCB with digital and relay connections. ----- PAW-T10	 PCB for server room application, control up to 4 indoor unit groups, redundancy, backup, etc. ----- PAW-PACR4	 Connector to PACi NX indoor unit's PCB to provide OPT functions. ----- PAW-OPT-NX	 Redundancy of 2 units YKEA-1. SG Ready. ----- PAW-SERVER-PKEA-1
---	---	--	---

Accessories cables

 Cable for all the T10 functions. ----- CZ-T10	 Cable to operate external EC fan. ----- PAW-FDC	 Cable for all option monitoring signals. ----- PAW-OCT	 Cable with force thermo OFF/leakage detection. ----- PAW-EXCT
---	---	---	---

Accessories for Jet Air Stream

 Touch panel controller with Modbus integration and group control up to 8 units. ----- PCZ-AHRX0012	 Recessed mounting box for controller. ----- PCZ-AHRP0681	 Ducted air intake plenum (1 x DN 355 mm) for VTVF140N and VTVF140P. ----- PCZ-AHRX0051
 Ducted air intake plenum (2 x DN 355 mm) for VTVF250N and VTVF250P. ----- PCZ-AHRX0052	 Ground air intake module (VTVF250 requires two of them). ----- PCZ-AHRX0061	 Air supply grille for ducts. ----- PCZ-AHRX0071